

The NOHP3 polycentric knee provides a high degree of geometric stance stability and a smooth pneumatically controlled swing phase thanks to its long side links. Patients in Mobility Class 3 can benefit from the High Performance cylinder, which has independent flexion and extension adjustments.


CES OSS K03: Use this code to read the NOHP3 clinical evaluation summary on the Steeper website.

Features and Benefits

- Polycentric construction provides improved ground clearance in swing phase
- Transition into swing phase adjustable by means of stance wedges
- Pneumatic cylinder with independent flexion and extension adjustments
- Unlimited rotation and 5mm of shift in any direction are possible



Unlimited rotation and 5mm of shift



High knee flexion angle 150°




Pneumatic swing phase control

Ordering Information

Trial Period - There is no trial period on this knee.


Mobility Class & Weight Limit

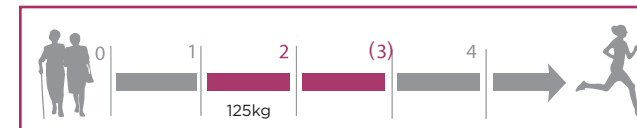



| Part Number | Description |
|-------------|---|
| NOHP3 | Pneumatic knee joint with pyramid adapter |


| | |
|--|------------------------------|
|  | Spare Knee Cover N1970763 |
|--|------------------------------|

Spare Parts Ordering Information


| | |
|---|------------------------------|
|  | Threaded Adapter N1633121 |
|---|------------------------------|

| | |
|---|------------------------------|
|  | Stance Wedge Kit N1970970 |
|---|------------------------------|

| | |
|---|---------------------------------|
|  | Pyramid Adapter Kit N1970863 |
|---|---------------------------------|

| | |
|---|------------------------------------|
|  | Laminating Adapter Kit N1970862 |
|---|------------------------------------|

Technical Information

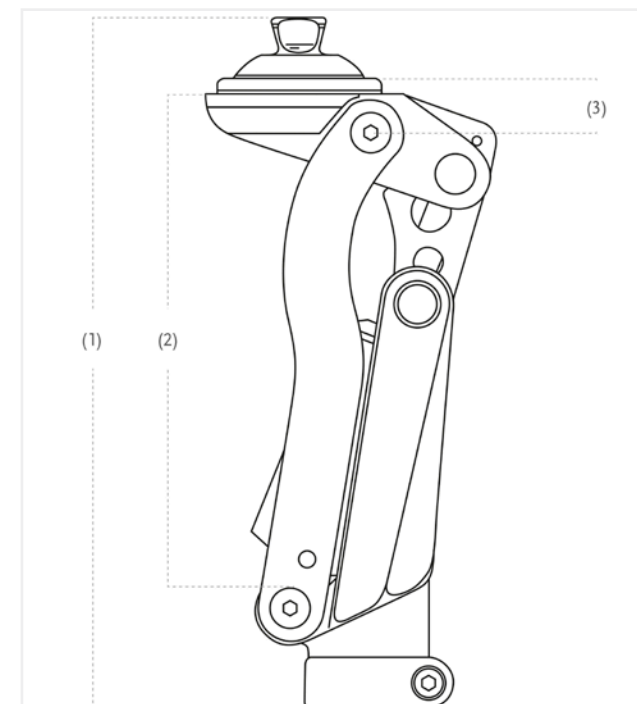

| | |
|------------------------------|-----------------------------|
| Material | Aluminium |
| Amputation Level | Transfemoral |
| Total Fitted Height (1) | Approx 215mm |
| Effective Module Height (2) | Approx 158mm |
| Fitted Height (3) | Approx 18mm |
| Weight | Approx 1025g |
| Ground Clearance | Approx 1.5cm |
| Distal Connector | Integral 30mm tube receiver |
| Swing Phase | Pneumatic |
| Stance Phase | Adjustable stance geometry |
| Axes | Polycentric |
| Flexion Angle without Socket | Approx 150° |
| Maximum Patient Weight | 125kg |
| Mobility Class | 2, (3) |
| Warranty | 3 years |